



BUILDING COMPONENTS

ROOF TRUSSES

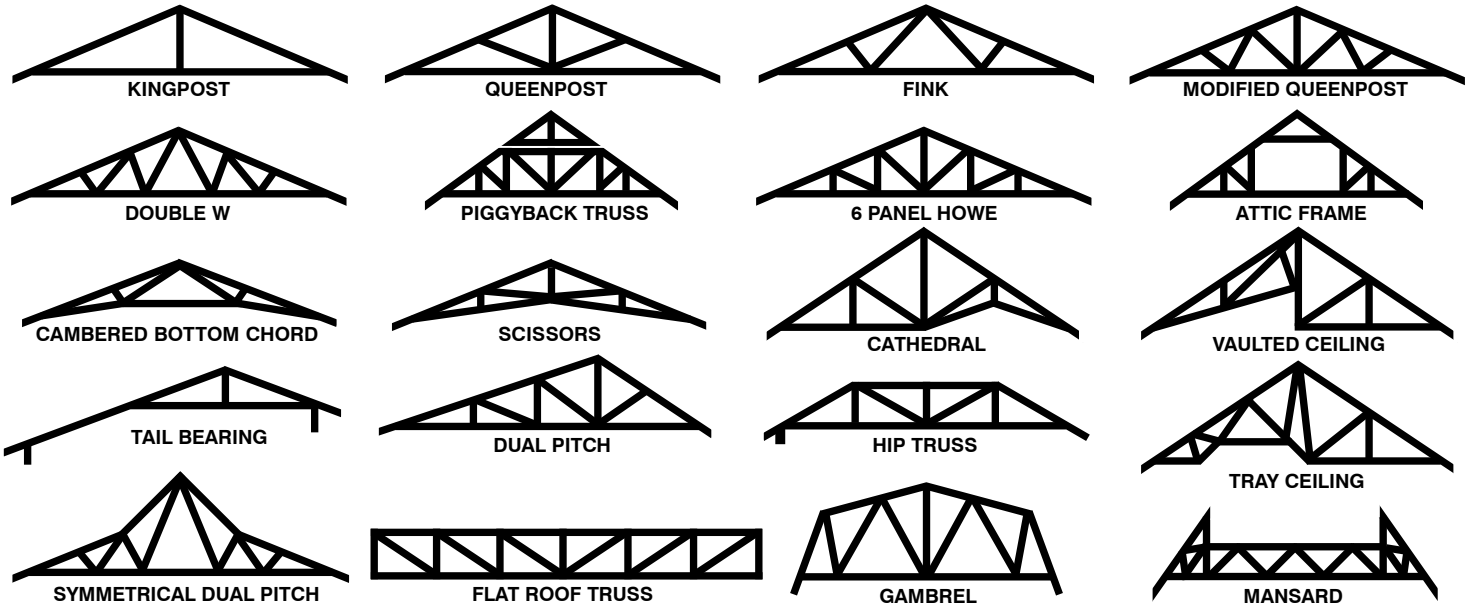

FLOOR TRUSSES

FLOOR TRUSS MAXIMUM CLEAR SPANS
RESIDENTIAL LOADING 40,10,0,5 @ 1.00%

| DEPTH | 24" o.c. | 19.2" o.c. | 16" o.c. |
|-------|----------|------------|----------|
| 12" | 18'-4" | 19'-10" | 20'-5" |
| 14" | 21'-2" | 22'-9" | 23'-3" |
| 16" | 23'-2" | 25'-3" | 25'-10" |
| 18" | 25'-3" | 28'-2" | 28'-9" |
| 20" | 27'-6" | 30'-7" | 31'-0" |
| 22" | 29'-6" | 32'-9" | 33'-5" |
| 24" | 31'-6" | 35'-0" | 35'-11" |

40 PSF T.C. LIVE
 10 PSF T.C. DEAD
 5 PSF B.C. DEAD
55 PSF TOTAL LOAD

